

HEATING VALVES



Kits supplied with 'A' rated TRVs for energy efficiency








# LST TRV KITS

MYSON offer a flexible and comprehensive range of TRV kits that are specifically designed to maximise the effectiveness of our range of LST radiators. For information on our LST range please see page 43.

We offer two designs, the Close Coupled Kit, which allows the case to be removed for cleaning without removing the TRV head, and the competitively priced Direct Fit Kit. Both come with our A-rated TRV and are expertly designed for precision control.

The kits allow the thermal sensing head of a MYSON Thermostatic Radiator Valve to be mounted directly onto the LST enclosure of a MYSON Low Surface Temperature Radiator. They also feature a locking facility that prevents unauthorised adjustment in public areas.

## GENERAL SPECIFICATION

- 
**CERTIFICATION**  
 Produced under a quality management system - ISO 9001:2008. Manual valve conforms to BS 2767-10 and TRV complies to EN 215-1.
- 
**CONNECTIONS**  
 Compression or screwed iron.
- 
**OPERATING PRESSURES**  
 Tested to a maximum pressure of 10 bar.
- 
**OPERATING TEMPERATURE**  
 Maximum 120°C.
- 
**DELIVERY**  
 2 - 5 working days.
- 
**GUARANTEE**  
 2 year guarantee from date of purchase against manufacturing defects.
- 
**COLOUR**  
 Finished in nickel or brass.

For more general information, please see page 242.

CCKTC


**DIRECT FIT TRV KIT**



**Direct Fit TRV Kit comprises:**

- 1 Horizontal angle TRV body
- 1 TRV head
- 1 Extension adaptor
- 1 Plastic bush
- 1 MATCHMASTER lockshield valve

**Order Code: DIRECTFIT**

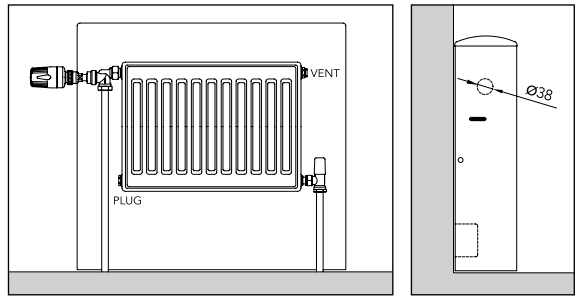

Direct Fit Kit


**CLOSE COUPLED TRV KIT**



**Close Coupled TRV Kit comprises:**

- 1 TRV head & limit pins
- 1 1/2" 15mm angle body
- 1 LST capillary unit
- 1 Head locating body
- 1 1/2" 15mm FULLFLOW lockshield valve

**Order Code: CCKTC**

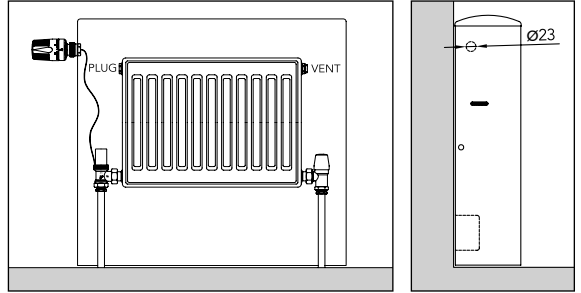


Close Coupled Kit



**Close Coupled TRV Kit for 420mm comprises:**

- 1 TRV head & limit pins
- 1 1/2" 15mm straight body
- 1 LST capillary unit
- 1 Head locating body
- 1 1/2" 15mm FULLFLOW straight lockshield valve
- 2 Integration elbows

**Order Code: CCKTC420**  
 (must be ordered with 420mm wide radiators)

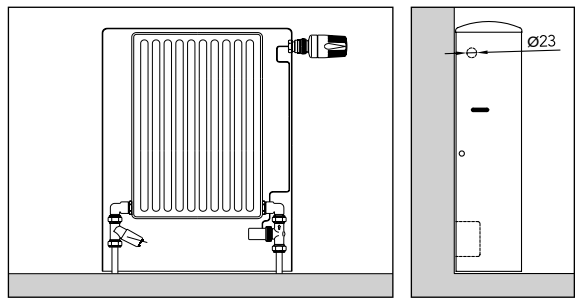

Close Coupled Kit for 420mm

**REMOTE SENSOR**



This allows the TRV head to be fitted inside the LST casing. The TRV valve body must be fitted on the bottom opposite end of the radiator. It is NOT suitable for top end connection. The sensor may be positioned up to 5 metres from the casing.

**Order Code:**  
 2TRVRSHEAD5 (5 METRE)  
 2TRVRSHEAD2 (2 METRE)

**REMOTE ADJUSTER**



Suitable for TBOE or BOE connections. The TRV head/sensor is mounted directly onto a wall plate and may be fitted up to 5 metres from the emitter.

**Order Code:**  
 2TRVADJHEAD5 (5 METRE)  
 2TRVADJHEAD2 (2 METRE)

Description	Order Code	Minimum Order Qty
15mm & 1/2" Close Coupled TRV Kit	CCKTC	1
15mm & 1/2" Close Coupled TRV Kit for 420mm	CCKTC420	1
15mm & 1/2" Direct Fit TRV Kit (now includes BS lockshield)	DIRECTFIT	1
Replacement Capillary for CCKTC	2TRVLSTCAP	1
Extended 2.5m Capillary for CCKTC. Use with TBOE connections 1800mm radiators and above	2TRVLSTCAP2.5	1
Replacement head locating body for CCKTC	2TRVLSTHLB	1