




## PICO

Simple and elegant, PICO is a classic ladder rail manufactured from high-grade non-corrosive stainless steel. It has clean lines, and a beautiful polished finish, and will complement a traditional or contemporary suite. Its practical rail spacing and range of sizes makes it a flexible choice for any project.

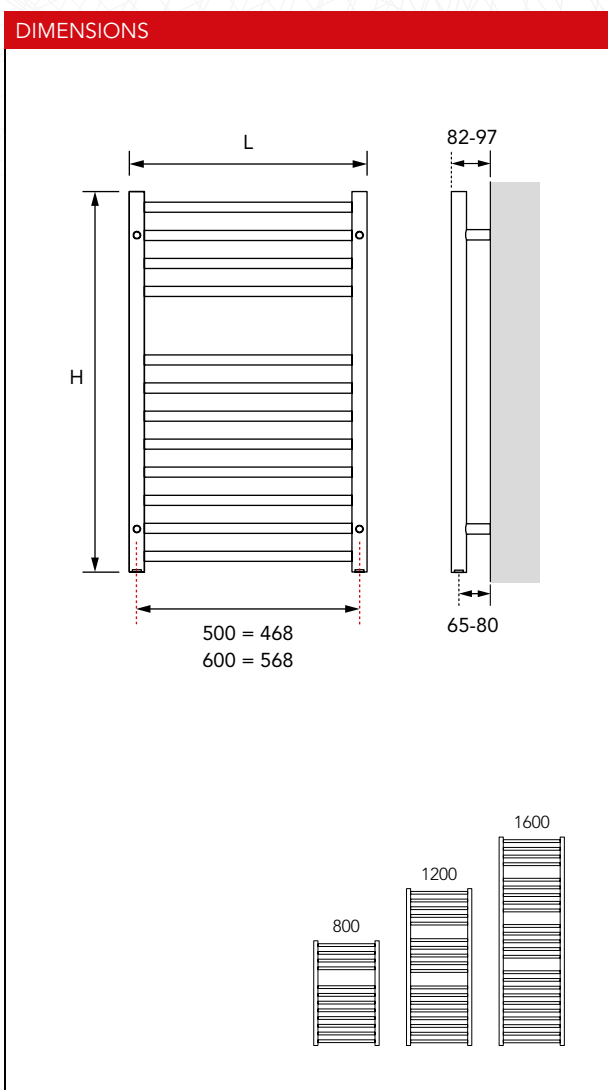

**GENERAL SPECIFICATION**

- CERTIFICATION**  
Manufactured and tested to BS EN 442.
- GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**  
Finished in polished stainless steel.
- MATERIAL**  
Manufactured from non-corrosive stainless steel.
- SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.
- CONNECTIONS**  
2 x 1/2" BSP as standard.
- AIR VENTS**  
Integrated.
- OPERATING PRESSURES**  
Tested to a pressure of 16.9 bar. Working pressure of up to 10 bar.
- DELIVERY**  
2 - 5 working days.
- VALVES**  
Please see page 118.

For more general information, please see page 242.

**WEIGHTS, WATER CONTENTS & n-COEFFICIENTS**

Model	Weight (kg)	Water Content (l)	n-Coefficient
PIC85SS	4.60	2.8	1.224
PIC86SS	5.60	3.2	1.200
PIC125SS	7.10	4.2	1.274
PIC126SS	7.20	4.7	1.264
PIC165SS	8.50	5.5	1.278
PIC166SS	8.90	6.3	1.276

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
PIC85SS	800	500	209	713	112	382
PIC86SS	800	600	241	822	131	447
PIC125SS	1200	500	309	1054	161	549
PIC126SS	1200	600	358	1221	188	641
PIC165SS	1600	500	417	1423	217	740
PIC166SS	1600	600	481	1641	251	856