

# General specification



#### CERTIFICATION

Produced under a quality management system -ISO 9001:2008. Pressure tested in accordance with BS 2767.



## **GUARANTEE**

2 year guarantee from date of purchase against manufacturing defects.



## COLOUR

Finished in chrome.



### CONNECTIONS

Compression and pushfit.



### OPERATING PRESSURES

Operating pressure 10 bar (compression) and 3 bar (pushfit).



#### OPERATING TEMPERATURE

Operating temperature 120°C (compression) and 92°C (pushfit).



#### **DELIVERY**

2 - 5 working days.



White PLUSTRVHEADW

PLUSTRV15AC


For more general information, please see page 254.

#### MVCON DI IIC

Description	Colour (Top)	Order Code	Minimu Order Q	
10mm TRV Angle Chrome	White	PLUSTRV10AC	50	
15mm TRV Angle Chrome	White	PLUSTRV15AC	50	
AYSON PLUS pushfit 🖺				
15mm TRV Angle Chrome Pushfit	White	PLUSTRV15ACPF	50	
15mm Wheelhead Angle Chrome Pushfit	White	PLUS15WACPF	10	
15mm Lockshield Angle Chrome Pushfit	White	PLUS15LACPF	10	
AYSON PLUS pack  Radpack 10mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome	White	PLUSPAK10AC	50	
Radpack 10mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome Drain Off	White	PLUSPAK10ACD	50	
Radpack 15mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome	White	PLUSPAK15AC	50	
Radpack 15mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome Drain Off	White	PLUSPAK15ACD	50	

MYSON PLUS Thermostatic Head Only White

## Technical information

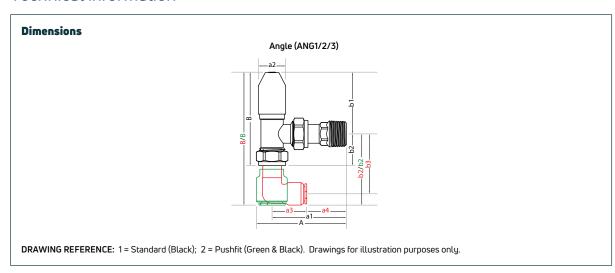

Model	DWG Ref.	Α	a1	a2	В	b1	b2		
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
MYSON PLUS									
10mm TRV Angle Chrome	ANG1	86	62	49	130	101	29		
15mm TRV Angle Chrome	ANG1	86	62	49	130	101	29		
MYSON PLUS PUSHFIT									
15mm TRV Angle Chrome Pushfit	ANG2	86	62	49	135	101	34		
15mm Wheelhead Angle Chrome Pushfit	ANG2	76	60	31	84	50	34		
15mm Lockshied Angle Chrome Pushfit	ANG2	72	60	22	84	50	34		

NB: All measurements are nominal.









PLUSTRV15ACPF



